BOSCO Toll Free: 1+888-366-1066

Top Mount Sink Installation -Single Bowl and Double Bowl

BOSCO


® Top Mount Sink Installation -Single Bowl and Double Bowl

PRIOR TO INSTALLATION

- 1. Ensure all parts listed are contained in the packaging
- 2. Observe all plumbing and building codes that are subject to your area
- 3. Only handle the sink with protective gloves as the edges may be sharp
- 4. Countertop must be flat to ensure a proper seal
- 5. Not included with product: Silicone adhesive/caulk

INCLUDED IN PACKAGE

- A. (1)Top mount sink template
- B. (1) Stainless Steel Sink
- C. (10) Mounting Screws
- D. (10) Mounting Clips
- E. Mounting Hook on sink

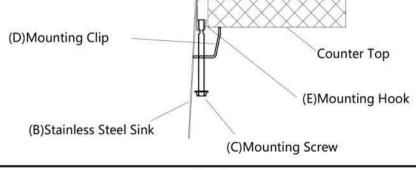


Page 1

INSTALLATION FORTOP MOUNT

- 1. Place the template (A) on the countertop.
- 2. Ensure the template (A) is centered and flat on the counter so that it is parallel to the counter edge and that the installation hole will not interfere with the structure of the cabinet.
- 3. Tape the template (A) to the countertop to keep it in place while tracing the perforated line on the template (A) with a pencil. Once traced, your line will be left on the surface.
- 4. Using the appropriate cutting tools, cut the countertop material along the line that was traced in step 3. Check fit of the sink and refine the cut if necessary.
- 5. Screw all the (C) mounting screws into (D) mounting clips prior to inserting them into mounting hooks.

6. Insert all (C) mounting screws with attached (D) mounting clips into the hooks as shown



above. Space uniformly around the sink.

- 7. Place a bead of silicone sealant (not included) around the cutout of the countertop.
- 8. Secure sink to countertop ensuring it is aligned properly.
- 9. Tighten (C) mounting screws around the sink using a flat head screwdriver as shown below so bottom of (D) mounting clip secures to the bottom of the countertop.
- 10. Wipe away any excess silicone and, for best results, allow the sink to remain undisturbed for at least eight hours.